


High-End Speed Swing Gate Turnstile SI-141

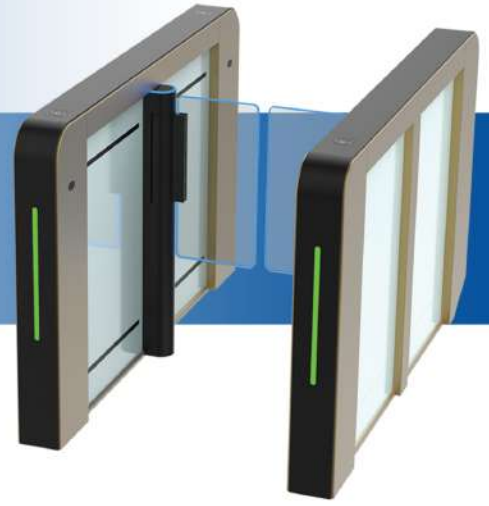

Application

Office and administrative buildings
 .Ministries and public, buildings banks
 and financial institutions industrial
 installations, sesidential areas schools,
 colleges and universities.

Standard Equipment

- Driving motor DC24V servo motor.
- Acrylic (tempered glass for optional).
- Colour (Champagne gold+black & titanium grey+black & titanium black + black for optional).

Operating Environment



- Indoor, -25 C° - 70 C°.
- IP42.
- MTBF 20 million times.

Electrical Equipment

- Power supply voltage : 100W(left/right), 200W(middle).
- Relative humidity : ≤ 90%, no condensation.
- Method of Positioning : servo motor + clutch + encoder.
- Direction of passing : Uni-directional/Bi-directional.
- Passing LED indicator : Motor and arm with LED indicator.
- Passing width : 600~900mm.
- IR Sensor : 14 Pairs.
- Passing speed : 35-40 people/min.
- Opening speed : Fastest 0.3s, adjustable.
- Input interface : Relay (Dry Contact).
- Angle of gate opening : 90°±5 °.
- Noise : < 50dB.
- Communication interface : Level/Pulse/RS485/RS232.

Dimension and material

- Size : 1600*280*980mm.
- Materials : SUS304 brushed stainless steel.

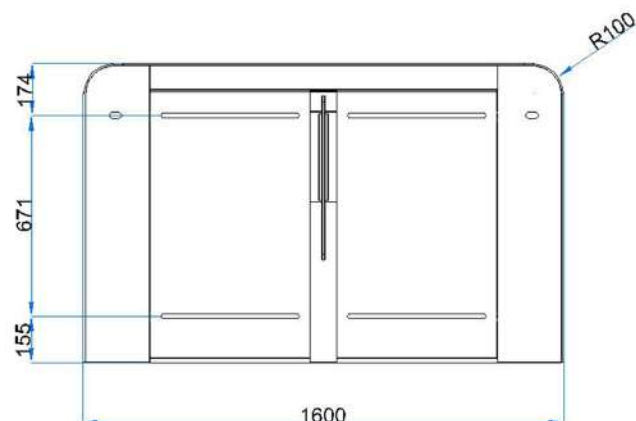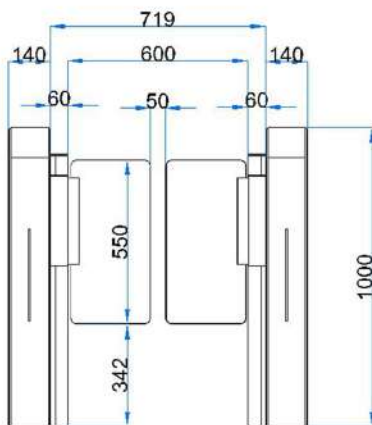

* Design & dimension subject to change without prior notice, please contact us for further information.