



Fix Heat Detector FD - 914


ISO 9001, CE Approved

Description :

Fixed temperature heat detector operates on temperature differential sensing principle, with a sensor making mechanical contact. It is made of high quality material, providing excellent contact despite any environmental conditions. This detector is suitable for location with high temperatures and temperature differentials, such as kitchen, restaurant and boiler house where there is constant use of heat.

Product Feature :

- Dual LEDs for 360-degree visibility
- Stabilized performance, long term durability and least-malfunction are ensured by employing UL approved sensor
- Mechanical operating principles ensure the long-term durability and the least malfunction.
- Self-restoring function ensures the elements repeatedly use.
- The sensitive part is enclosed to prevent from being moistened and contaminated

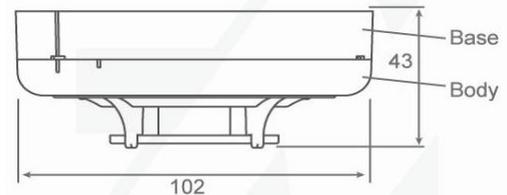

Specifications:

Model	FD - 914	FD - 914R
Type	2-wire	3-wire
Operating Voltage	DC 12 ~ 30 V	
Sensitivity Setting	Comply to EN54, CNS	
Alarm Current	30 mA Max (at DC 24V)	
Polarization	Non-polarized	Polarized
Operating Mode	Always Open Type	
Ambient Temperature	-10°C ~ +55°C	
Relative Humidity	0 - 95% RH	
Detecting Area	60 Square meter (Ceiling Height under 4M)	
Material	Fire-Proof plastic	
Dimensions	ø 102 x 43(H) mm	
Color	White	
Weight	109g	

